




2018-2019 ನೇ ಸಾಬನ್ ದರವ್ವ

ಲೋಕೋಪಯೋಗಿ, ಬಂದರು ಮತ್ತು
ಒಳನಾಡು ಜಲಸಾರಿಗೆ ಇಲಾಖೆ,
ಬೆಂಗಳೂರು ವೃತ್ತ, ಬೆಂಗಳೂರು

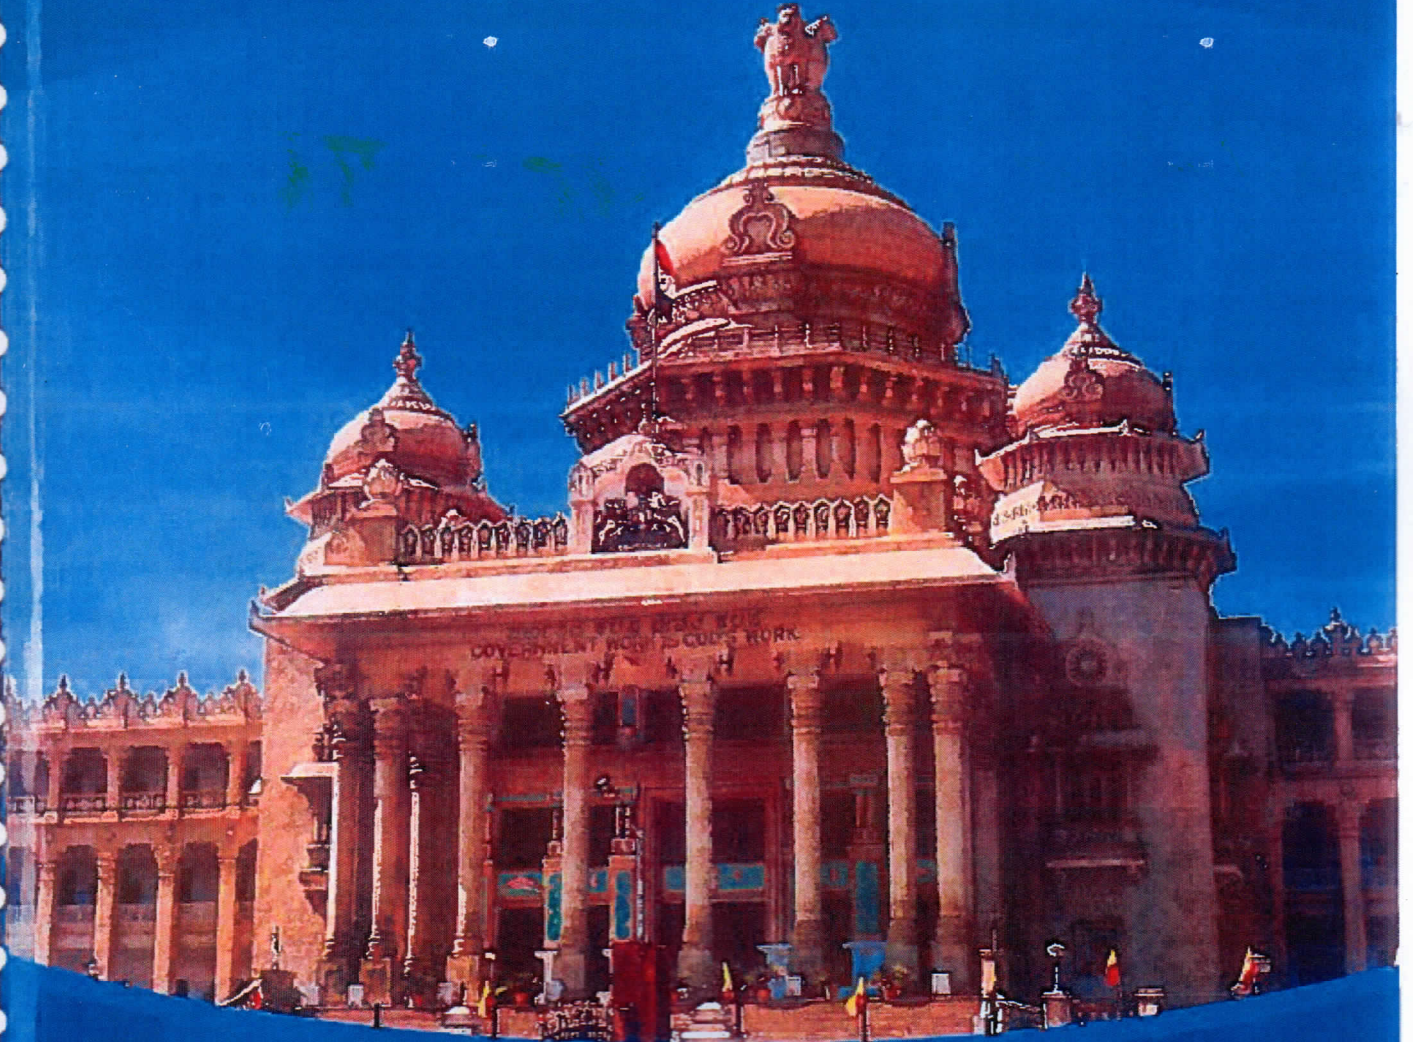

SCHEDULE OF RATES 2018-2019

**PUBLIC WORKS, PORTS & INLAND WATER
TRANSPORT DEPARTMENT
BENGALURU CIRCLE, BENGALURU**

Chapter No.	Particulars	Pages	
		From	To
18.	SITE CLEARANCE AND DISMANTLING	137	141
19.	EARTH WORK EROSION CONTROL AND DRAINAGE.....	142	151
20.	SUB BASES-BASES (NON-BITUMINOUS) AND SHOULDERS.....	152	156
21.	BASE AND SURFACE COURSES.....	157	172
22.	CONCRETE PAVEMENT.....	173	176
23.	GEOSYNTHETIC AND REINFORCED EARTH.....	177	178
24.	TRAFFIC SIGNS, MARKINGS & OTHER ROAD APPURTENANCES.....	179	195
25.	BRIDGES - PILE FOUNDATION.....	196	201
26.	BRIDGES - WELL FOUNDATION.....	202	218
27.	BRIDGES - OPEN FOUNDATIONS.....	219	224
28.	BRIDGES - SUB STRUCTURE	225	230
29.	BRIDGES - CONCRETE SUPERSTRUCTURE	231	239
30.	BRIDGES - RIVER TRAINING WORKS AND PROTECTION WORKS.....	240	242
31.	EXPANSION JOINTS.....	243	245
32.	BRIDGES - WEARING COAT & APPURTENANCES	246	248
33.	BRIDGES - REPAIR AND REHABILITATION	249	252
34.	PIPE CULVERTS	253	257
35.	MAINTENANCE OF ROADS	258	261
36.	REINFORCED EARTH STRUCTURE	262	264
37.	OTHER ITEMS.....	265	272
38.	INNOVATIVE ITEMS.....	273	322
39.	FURNISHING WORK.....	323	343
40.	FIRE FIGHTING WORK.....	344	376
41.	ENERGY CONSERVATION BUILDING CODE (ECBC)	375	382
	Drawings	383	383
	Annexure - 1.....	384	385
	Material Requirement.....	386	407

Sl. No.	Description	Unit	Rate Rs. Ps.	
38.50.4	<p>filled in the hollow portion of door shutters for structure rigidly & sound insulation. The necessary stiffeners of Galvanized plain steel sheet of minimum thickness 1.60 mm to be provided for all hardware fixtures. The rate is including transportation, loading, unloading, HOM etc. but excluding the hardware fixtures. Size – 650 x 2035 x 32 mm thick.</p> <p>Door Shutters - Wet areas – W.C. / Bath</p> <p>Providing & fixing factory made Galvanized steel door Shutters 32 mm thick manufactured from pre- painted Aluminium-zinc metallic coated steel sheet 0.60 mm thick conforming to the IS: 15961. The door shutters consists of two outer skins of steel sheets, lock seam jointed at vertical stile edges, horizontal top & bottom sides to form a double skin fully flush shell. Rigid polyurethane Foam (PUF) of density 40 Kg/M3 shall be filled in the hollow portion of door shutters for structure rigidly & sound insulation. The necessary stiffeners of Galvanized plain steel sheet of minimum thickness 1.60 mm to be provided for all hardware fixtures. The rate is including transportation, loading, unloading, HOM etc. but excluding the hardware fixtures. Size – 670 x 2045 x 32 mm thick.</p>			
38.52	<p>Providing Stainless steel reinforcement (Duplex Grade-532101) for RCC work including straightening, cutting, bending, hooking, placing in position, lapping and / or welding wherever required, tying with binding wire and anchoring to the adjoining members wherever necessary complete as per design (laps, hooks and wastage shall not be measured and paid) cost of materials, labour, HOM complete as per specifications.</p>	Tonne	2,14,452.00	
38.53	<p>Providing and mixing Alkali resistant integral glass fibers HD 67/36 to act as a replacement of steel reinforcement in supported slabs and to provide secondary reinforcement in concrete at 5 kg / cum of concrete, fibers of length 36 mm, diameter 19 microns, specific gravity 2.68, modulus of elasticity 72 Gpa and having the aspect ratio (length/dia) of 67, including cost of labour, materials and HOM etc complete. (Note: The work to be carried out with prior permission of the competent authority.) (NOTE: Rate is for cum of concrete)</p>	Cum	3,100.00	
38.54	<p>Providing and applying 2 coats of corrosion Inhibition cement slurry on Reinforcement bars prepared by mixing of 1 Kg of OPC with 500 CC of Inhibitor solution of approved quality by dipping or brushing method, the first coat being applied after cleaning the bars by wire brush or alkaline cleaning powder to remove the rust and dust, and allowed to air dry for 12-24 hours as the case may be and the second coat being applied on the fabricated bars before placing in position as per clause 5.3.3 of IS 9077-1979. The Rate includes cost and conveyance of all materials, labour charges etc., complete as per the direction of Engineer in-charge.</p>	Tonne	1,670.00	
38.55	<p>Providing and laying self-compacting controlled concrete produced by IS 9001 accredited plants conforming to EN 206-1 M-20 grade, with OPC @ 185 kg/cum conforming to EN-197-1 GGBS 175 kg/cum, 20 mm to 12.50 mm graded coarse aggregates @ 865 kg/cum, conforming to EN-12620 obtained from a single source with a ceiling flakiness index of 5% , M-sand @ 1015 kg/cum, having aggregate particles finer than 45</p>	Cum	4,824.00	